


FIRE HOSE REEL CABINET DOUBLE VERTICAL SURFACE MOUNTED, COMPLETE STAINLESS STEEL BRUSH FINISH, WITH SOLID DOOR WITH BREAK GLASS AND KEY (MODEL: NF-SSBK-900)



NOTES :-

	BILL OF	MATERIALS		
ITEM NO.	DESCRIPTION	MATERIAL	QT	
1.	CABINET BODY	1.2mm STAINLESS STEEL SHEET BRUSH FINISH	1	
2.	SOLID DOOR	1.2mm STAINLESS STEEL SHEET BRUSH FINISH	2	
3.	PIN HINGES	STAINLESS STEEL	3	
4.	SPRING LOCK WITH KEY	ALLOY STEEL	2	
	SPE	CIFICATIONS		
MODEL		NF SSBK 900		
PAINT FINISH		STAINLESS STEEL BRUSH FINISH		
DOOR OPENING		RIGHT OR LEFT		
	CABINET TO A	ACCOMMODATE		
TOP COMPARTMENT		1"x30Mtr. OR 3/4"x30Mtr. CABINET MOUNTED / WALL MOUNTED FIRE HOSE REEL		
BOTTOM COMPARTMENT		5Kg. CO2 EXTINGUISHER, 6Kg. DCP EXTINGUISHER 2.5" LANDING VALVE OR 1.5"x 30Mtr HOSE RACK / 2.5"x30Mtr. HOSE RACK		
BOT		1.5"x 30Mtr HOSE RAC	-	
	CKET POSITION	1.5"x 30Mtr HOSE RAC	-	
BRA		1.5"x 30Mtr HOSE RAC 2.5"x30Mtr. HOSE RAC	-	
BRA KNO	CKET POSITION	1.5"x 30Mtr HOSE RAC 2.5"x30Mtr. HOSE RAC RIGHT OR LEFT	-	
BRA KNO GEN	CKET POSITION CK OUT	1.5"x 30Mtr HOSE RAC 2.5"x30Mtr. HOSE RAC RIGHT OR LEFT AS PER INLET LINE	-	
BRA KNO GEN UNIT	CKET POSITION CK OUT ERAL TOLERANCE	1.5"x 30Mtr HOSE RAC2.5"x30Mtr. HOSE RACRIGHT OR LEFTAS PER INLET LINE±5MM	-	
BRA KNO GEN UNIT UNIT	CKET POSITION CK OUT ERAL TOLERANCE HEIGHT	1.5"x 30Mtr HOSE RAC 2.5"x30Mtr. HOSE RACRIGHT OR LEFTAS PER INLET LINE±5MM1650MM	-	

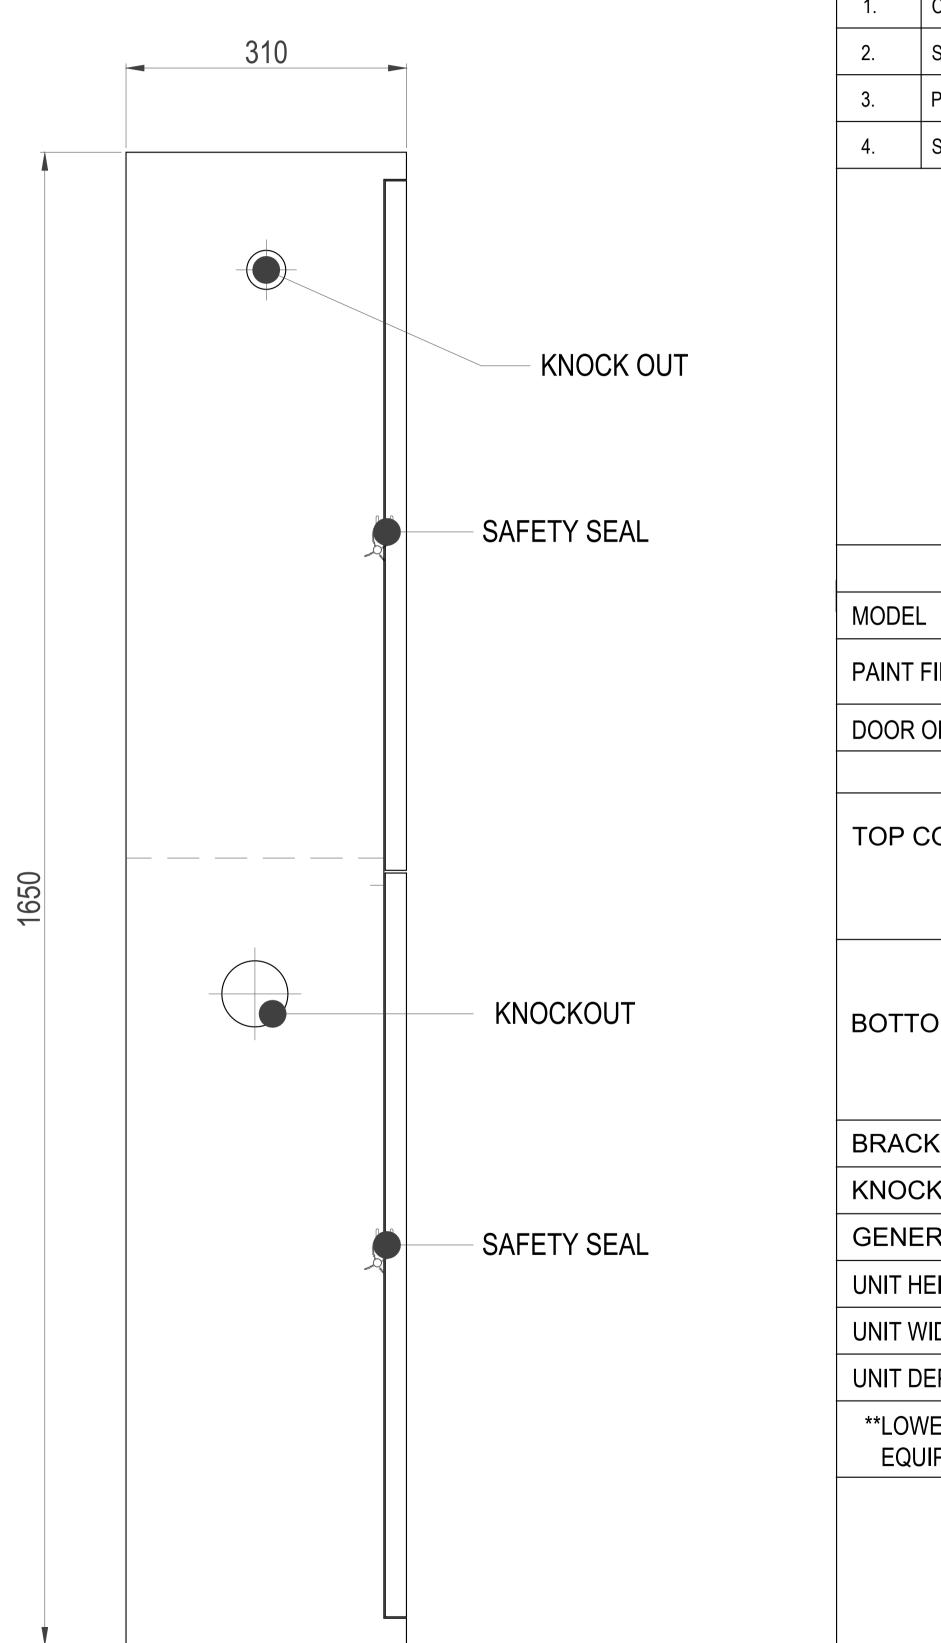

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED