




KNOCK OUT

SAFETY SEAL

KNOCKOUT

SAFETY SEAL

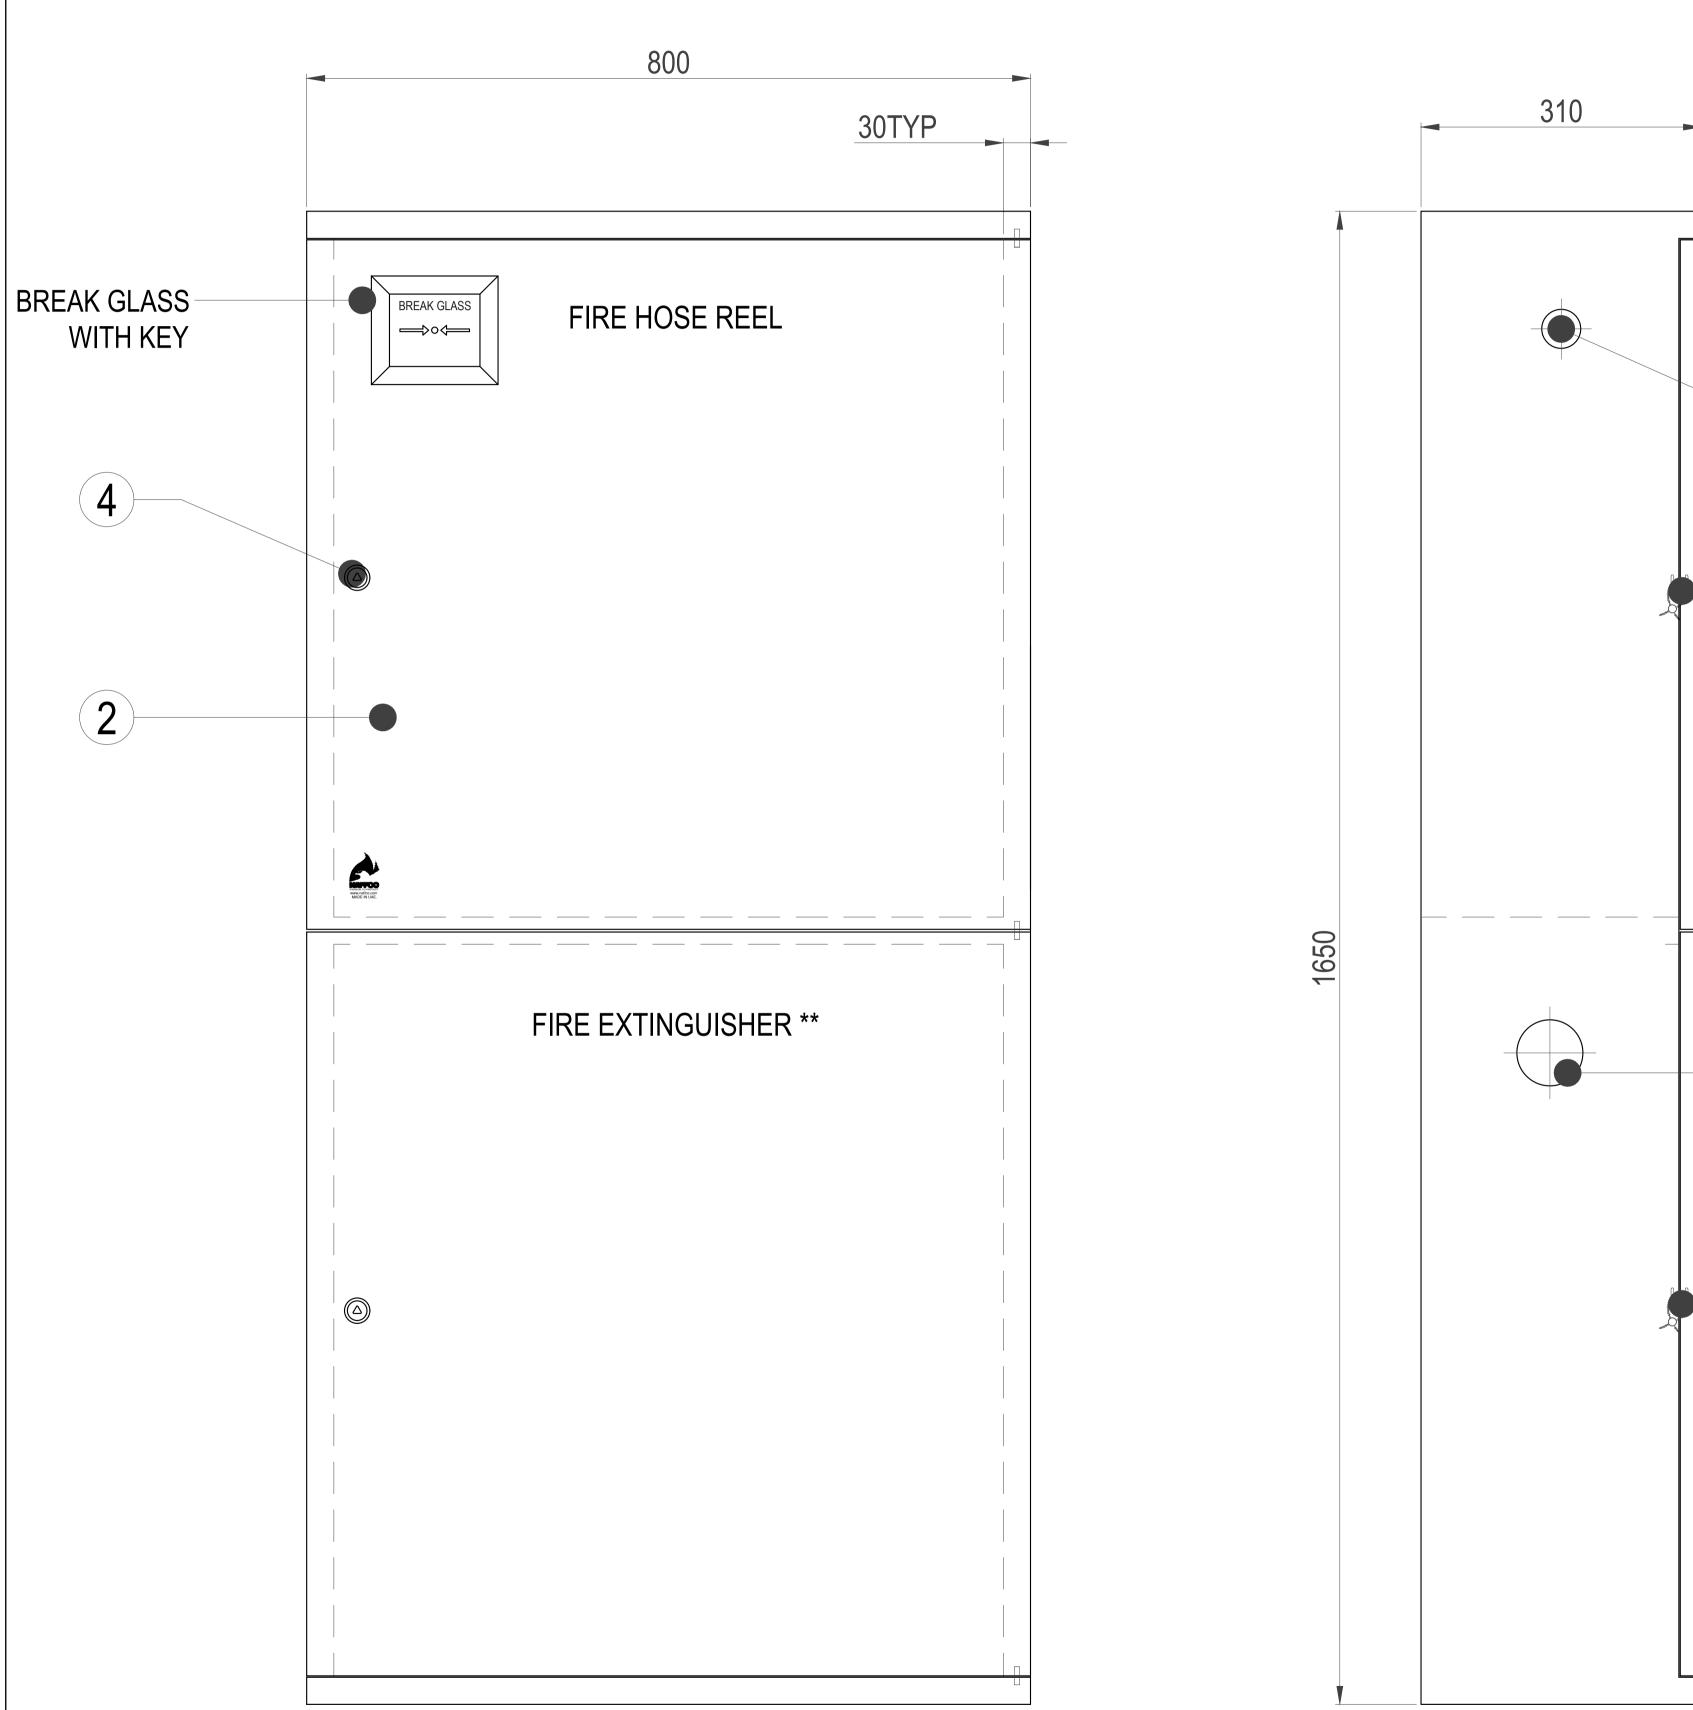



1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS			
ITEM NO.	DESCRIPTION	MATERIAL	QTY.
1.	CABINET BODY	1.2mm STAINLESS STEEL SHEET MIRROR FINISH	1
2.	SOLID DOOR	1.2mm STAINLESS STEEL SHEET MIRROR FINISH	2
3.	PIN HINGES	STAINLESS STEEL	3
4.	SPRING LOCK WITH KEY	ALLOY STEEL	2

SPECIFICATIONS			
MODEL	NF SSMK 900		
PAINT FINISH	STAINLESS STEEL MIRROR FINISH		
DOOR OPENING	RIGHT OR LEFT		
CABINET TO ACCOMMODATE			
TOP COMPARTMENT	1"x30Mtr. OR 3/4"x30Mtr. CABINET MOUNTED / WALL MOUNTED FIRE HOSE REEL		
BOTTOM COMPARTMENT	5Kg. CO2 EXTINGUISHER, 6Kg. DCP EXTINGUISHER 2.5" LANDING VALVE OR 1.5"x 30Mtr HOSE RACK / 2.5"x30Mtr. HOSE RACK		
BRACKET POSITION	RIGHT OR LEFT		
KNOCK OUT	AS PER INLET LINE		
GENERAL TOLERANCE	±5MM		
UNIT HEIGHT	1650MM		
UNIT WIDTH	800MM		
UNIT DEPTH	310MM		
**LOWER COMPARTMENT PRINTING WILL CHANGE ACCORDING TO THE EQUIPMENTS TO BE ACCOMMODATED			