


5KG. CO<sub>2</sub> PORTABLE FIRE EXTINGUISHER  
MODEL-NC5X\*

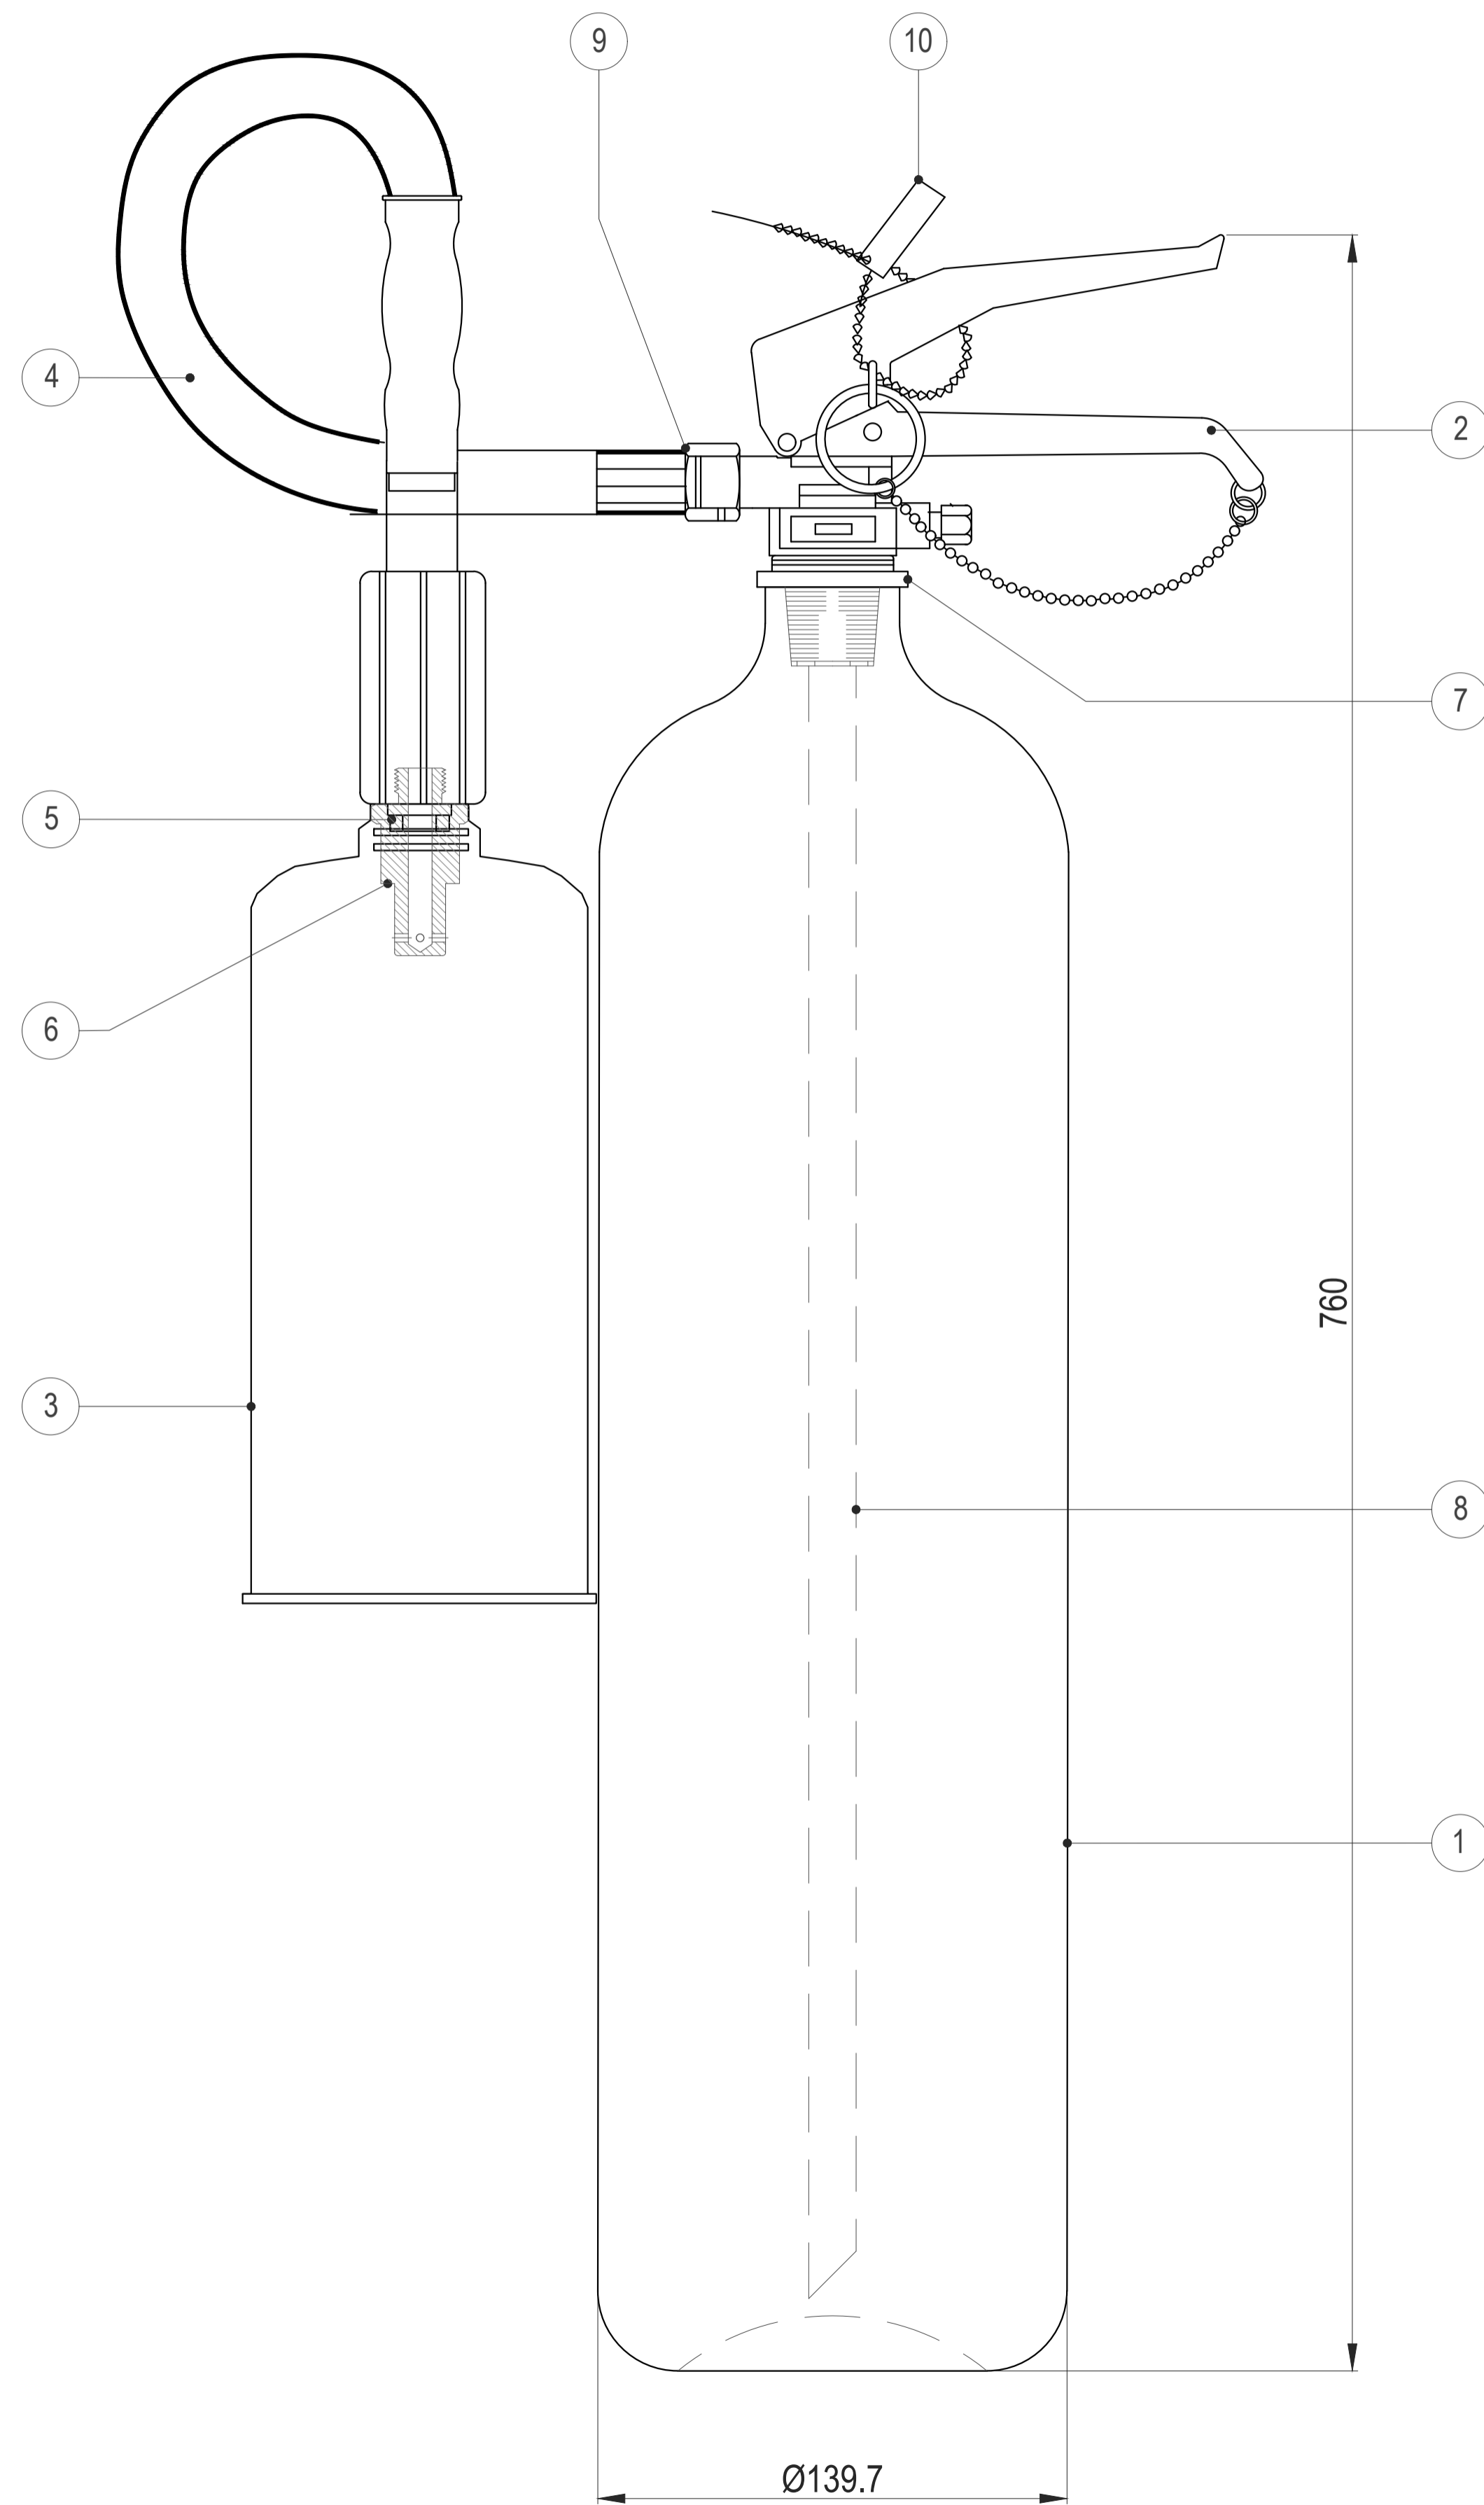

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

ITEM NO.	DESCRIPTION	MATERIAL	QTY.
1	CYLINDER	DIN 2440/1629 ST-52.D	1
2	CONTROL VALVE	BRASS NI-PLATED	1
3	HORN	HDPE BLACK INJECTION MOULDED	1
4	HOSE ASSY.	HIGH PRESSURE HOSE	1
5	LOCKING WASHER	EN-1A ZINC PLATED	
6	INSIDE BOLT	EN-1A YELLOW PASSIVATED	1
7	NECKING	HDPE RED INJECTION MOULDED	1
8	DIP TUBE	ALUMINIUM EXTRUDED	1
9	PVC WASHER	HDPE RED INJECTION MOULDED	1
10	SAFTEY BELT	POLY PROPELENE YELLOW, INJECTION MOULDED	1

**SPECIFICATIONS**

MODEL	NC5X*
PROPELLANT	SELF
EXTINGUISHANT	CO2
NOMINAL CHARGE	5 KG
FIRE RATING	70B
OPERATING TEMPERATURE	-20°C to +60°C
MAXIMUM OPERATING TEMPERATURE	174BAR@60°C
WORKING PRESSURE	55-60 BAR @ 25°C
DISCHARGE TIME	12 - 13 Sec
DISCHARGE RANGE	5 - 6 Mtr.
CYLINDER MATERIAL	CARBON STEEL
OVER ALL HEIGHT	760 mm
DIAMETER	139.7 mm
TOTAL WEIGHT	17.5 Kg Approx.
MFG. STANDARD	BS EN 3
HOSE LENGTH	750mm
APPROVAL	BSI Kitemarked