


**6KG. DCP FIRE EXTINGUISHER -
MODEL: NP 6**

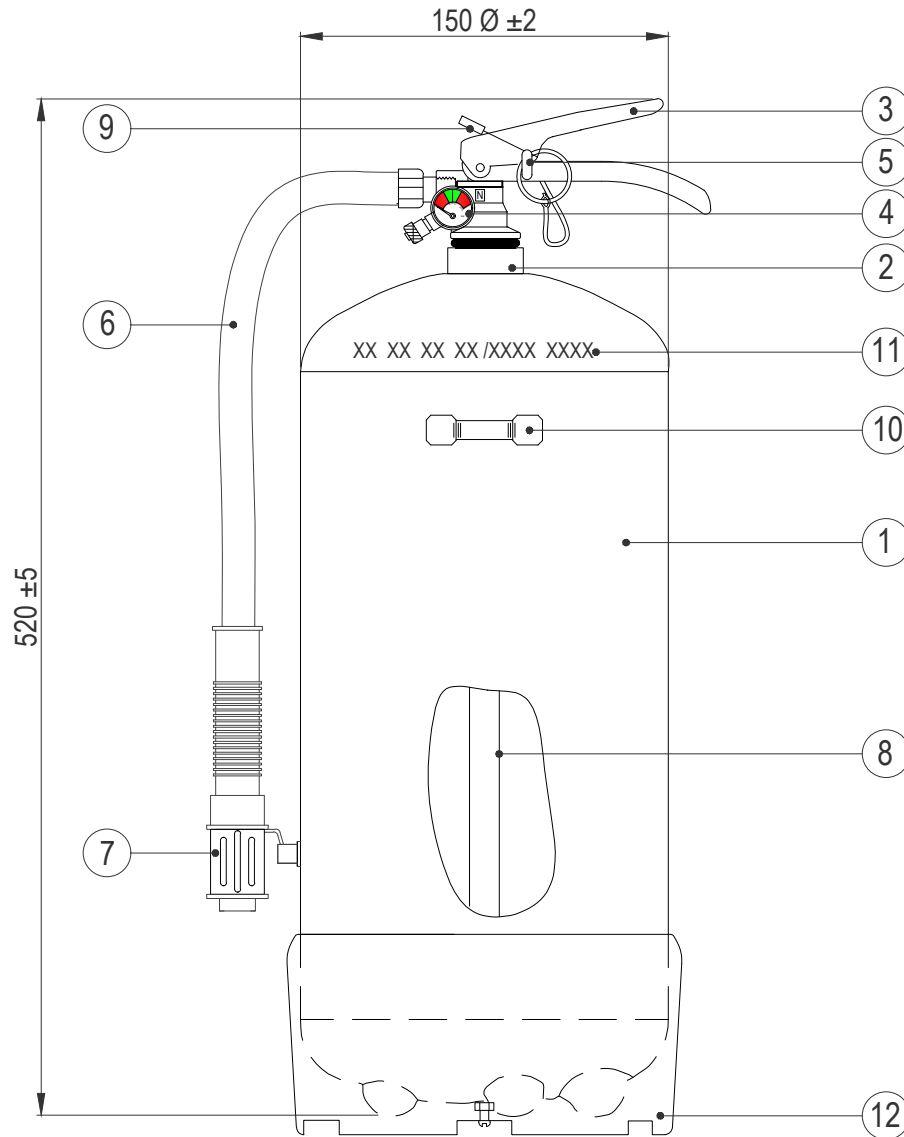

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

ITEM NO.	DESCRIPTION	MATERIAL	QTY.
1.	CYLINDER BODY	CRCA STEEL SHEET	1
2.	NECKRING	MILD STEEL	1
3.	EXTINGUISGER VALVE	"	1
4.	PRESSURE GAUGE	"	1
5.	SAFETY PIN	BRASS CHROME PLATED	1
6.	HOSE	RUBBER	1
7.	NOZZLE	ALUMINUM	1
8.	DIP TUBE	PVC	1
9.	SAFETY BELT	PVC	1
10.	BRACKET HOLDER	CRCA STEEL SHEET	1
11.	PRODUCT DESIGNATION	-	1
12.	BASE	PVC	1

SPECIFICATION:-

MODEL	NP 6
PROPELLANT	NITROGEN & HELIUM
EXTINGUISHANT	DRY CHEMICAL POWDER ABC 85%
NOMINAL CHARGE	6 KG
CYLINDER FINISH	POLYESTER POWDER COATED
COLOR	RED
FIRE CLASS	A B C & E
FIRE RATING	34A 183B
TEMPERATURE RANGE	-20°C TO +60°C
TEST PRESSURE	30 BAR
WORKING PRESSURE	15 BAR
DISCHARGE TIME	18 - 20 SEC
DISCHARGE RANGE	6 - 8 MTR.
CYLINDER MATERIAL	CRCA STEEL SHEET
VALVE MATERIAL	BRASS FORGED
OVER ALL HEIGHT	520 MM
DIAMETER	150 MM
TOTAL WEIGHT	10 KG APPROX.
MFG. STANDARD	BS EN 3
APPROVAL	BSI KITEMARKED