


**6LTR. ECO BARID FOAM FIRE EXTINGUISHER -  
MODEL: NF 6EB**

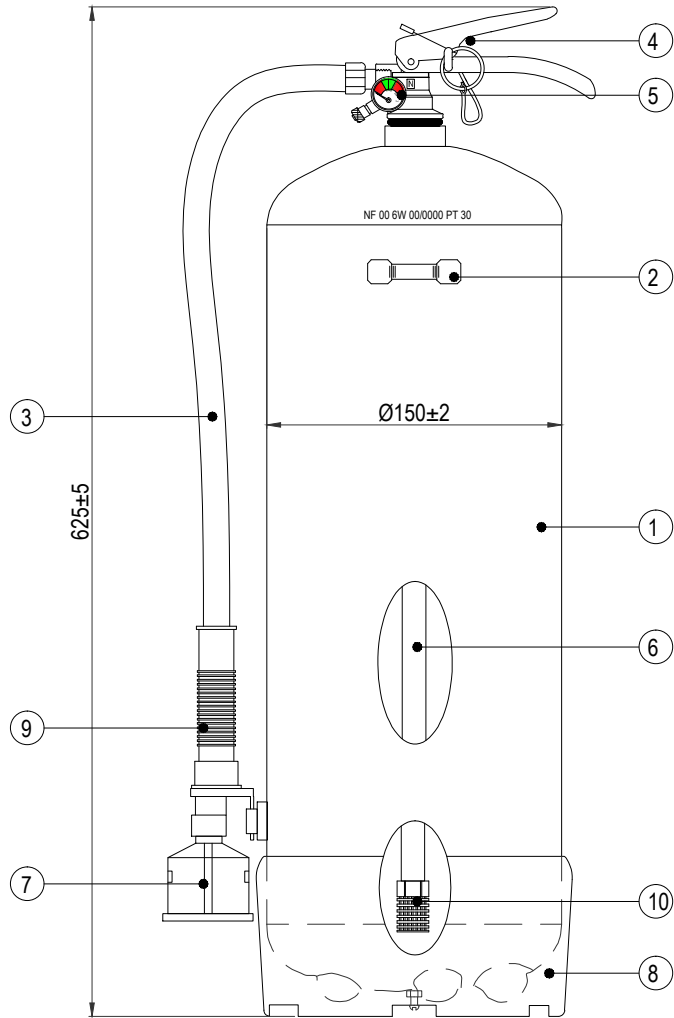

**NOTES :-**

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

**BILL OF MATERIAL:-**

ITEM No.	DESCRIPTION	MATERIAL	QTY.
1	CYLINDER	CRCA STEEL SHEET	1
2	BRACKET HOLDER	CRCA STEEL SHEET	1
3	HOSE	RUBBER	1
4	EXTINGUISHER VALVE	BRASS CHROME PLATED	1
5	PRESSURE GAUGE	BRASS CHROME PLATED	1
6	DIP TUBE	PVC	1
7	NOZZLE	PVC	1
8	BASE	PVC	1
9	HOSE GRIP	RUBBER	1
10	FILTER	PVC	1

**SPECIFICATION:-**

MODEL	NF 6EB
EXTINGUISHER CAPACITY	6 Ltr.
PROPELLENT	95% NITROGEN + 5% HELIUM
FIRE RATING	21A 183B 40F
WORKING PRESSURE	14 BAR
MAX. OP. PRESSURE	18.5 BAR @ 60°C
TEST PRESSURE	30 BAR
TOTAL WEIGHT	11.5 Kg.
RANGE OF DISCHARGE	6 Mtr.
HOSE LENGTH WITH NOZZLE	680 mm.
DURATION OF DISCHARGE	22-25 Sec.
WORKING TEMPERATURE	+5°C TO +60°C
CYLINDER MATERIAL	CRCA STEEL SHEET