


**9 LTR. FOAM FIRE EXTINGUISHER -
MODEL: NF 9**

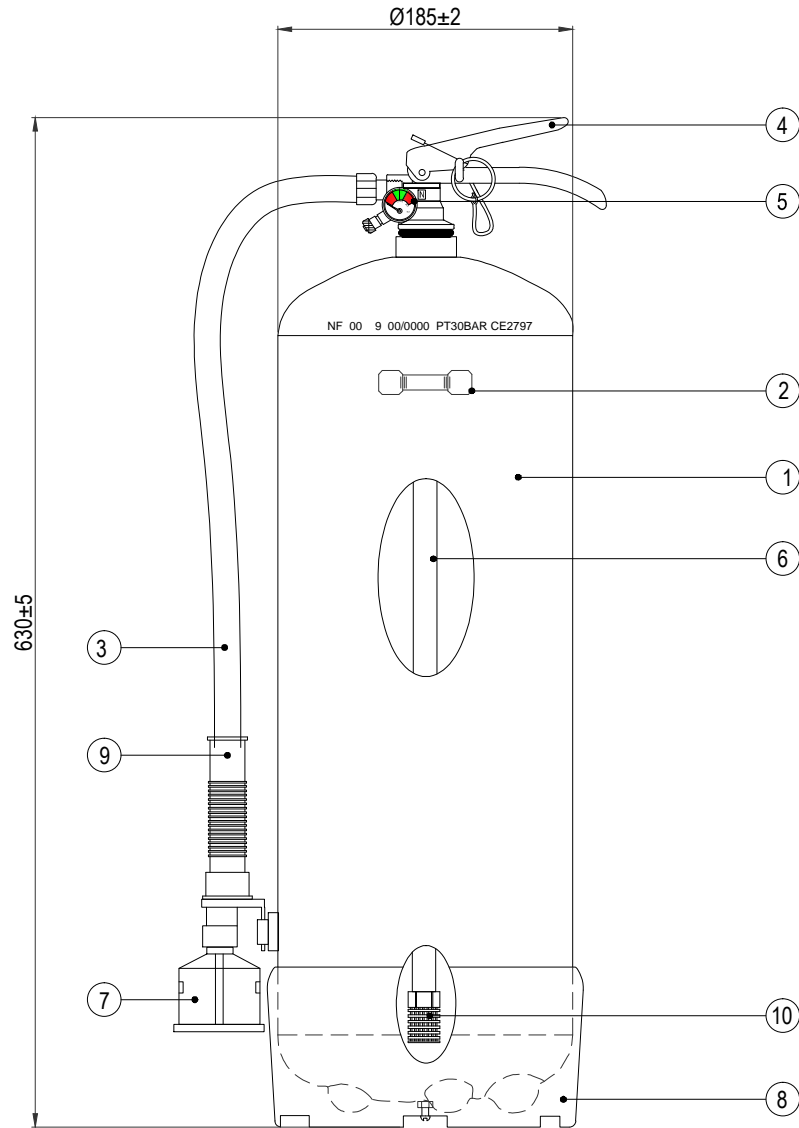

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIAL

| ITEM No. | DESCRIPTION | MATERIAL | QTY. |
|----------|--------------------|---------------------|------|
| 1 | CYLINDER | CRCA STEEL SHEET | 1 |
| 2 | BRACKET HOLDER | CRCA STEEL SHEET | 1 |
| 3 | HOSE | RUBBER | 1 |
| 4 | EXTINGUISHER VALVE | BRASS CHROME PLATED | 1 |
| 5 | PRESSURE GAUGE | BRASS CHROME PLATED | 1 |
| 6 | DIP TUBE | PVC | 1 |
| 7 | NOZZLE | PVC | 1 |
| 8 | BASE | PVC | 1 |
| 9 | HOSE GRIP | RUBBER | 1 |
| 10 | FILTER | PVC | 1 |

SPECIFICATION:-

| | |
|-----------------------|--------------------------|
| MODEL | NF 9 |
| EXTINGUISHER CAPACITY | 9 Ltr. |
| PROPELLANT | 95% NITROGEN + 5% HELIUM |
| FIRE RATING | 21A 183B |
| WORKING PRESSURE | 14 BAR |
| MAX. OP. PRESSURE | 18.5 BAR @ 60°C |
| TEST PRESSURE | 30 BAR |
| TOTAL WEIGHT | 15.5KG |
| RANGE OF DISCHARGE | 7-8Mtr. |
| DURATION OF DISCHARGE | 32-35 Sec. |
| OPERATING TEMPERATURE | +5°C TO +60°C |
| CYLINDER MATERIAL | CRCA STEEL SHEET |