


6 LTRS. WATER FIRE EXTINGUISHER
MODEL: NW 6

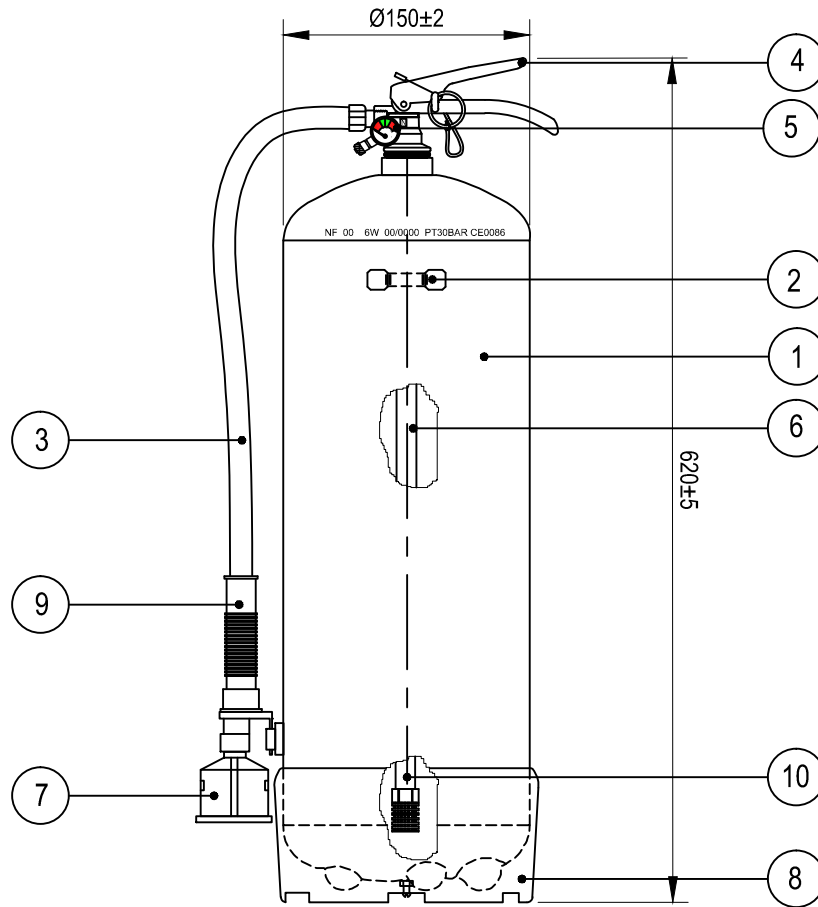

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

| SL. NO | DESCRIPTION | MATERIAL | QTY. |
|--------|--------------------|------------------------|------|
| 1 | CYLINDER | CRCA STEEL SHEET | 1 |
| 2 | BRACKET HOLDER | CRCA STEEL SHEET | 1 |
| 3 | HOSE | RUBBER | 1 |
| 4 | EXTINGUISHER VALVE | BRASS CHROME PLATED | 1 |
| 5 | PRESSURE GAUGE | BRASS CHROME PLATED | 1 |
| 6 | DIP TUBE | PVC | 1 |
| 7 | NOZZLE | PVC | 1 |
| 8 | BASE | PVC | 1 |
| 9 | HOSE GRIP | RUBBER | 1 |
| 10 | FILTER | PVC | 1 |

SPECIFICATION:-

| | |
|----------------------------|--------------------------|
| MODEL No. | NW 6 |
| EXTINGUISHER CAPACITY | 6 L |
| PROPELLANT | 95% NITROGEN + 5% HELIUM |
| FIRE RATING | 13A |
| WORKING PRESSURE | 14 BAR |
| MAXIMUM OPERATING PRESSURE | 18.5 BAR @ 60°C |
| TEST PRESSURE | 30 BAR |
| TOTAL WEIGHT | 11.5 Kg |
| RANGE OF DISCHARGE | 6m |
| DURATION OF DISCHARGE | 22-25 Sec. |
| HOSE LENGTH WITH NOZZLE | 680mm |
| OPERATING TEMPERATURE | +5°C TO +60°C |
| CYLINDER MATERIAL | CRCA STEEL SHEET |
| HEIGHT x DIAMETER (mm) | 620 x 150 |