

# WET CHEMICAL FIRE EXTINGUISHERS (AS/NZS 1841.3)

## FEATURES


- Australian & New Zealand Standard AS/NZS 1841.3, certified by Global-Mark Pty Ltd.
- High quality polyester paint.
- Internally coated by thermoplastic coating powders blend of polyolefin to prevent corrosion.
- Fire mist spray to prevent grease splashing.
- Brass nickel chrome plated head valve with simple squeeze operation.
- Unique gage testing system.
- Unique color code handle and base (optional).
- Rechargeable and easy to service.



*Ideal Use:* Commercial kitchens in connection with SHIELD Pre-engineered Hood Systems.  
*\*Caution:* Don't use on electrical fire.

## SPECIFICATION

Model Number	2-NKE-A	7-NKE-A	7-NKES-A
Extinguisher Capacity	2 Ltr	7 Ltr	7 Ltr
Propellant	95% Nitrogen + 5% Helium		
Fire Rating	4F		
Working Pressure	10 Bar		
Maximum Operating Pressure	11.5 Bar @ 60°C		
Test Pressure	30 Bar		
Total Weight	4.4 Kg	14.3 Kg	13.5 Kg
Range of Discharge	1 Mtr.		
Duration of Discharge	40 - 45 Sec.	91 Sec.	90 - 95 Sec.
Hose Length with Nozzle	400 mm	797 mm	797 mm
Operating Temperature	+5°C to +60°C		
Height x Diameter (mm)	403 x 110	515 x 185	515 x 184
Cylinder Material	CRCA Steel Sheet		Stainless Steel

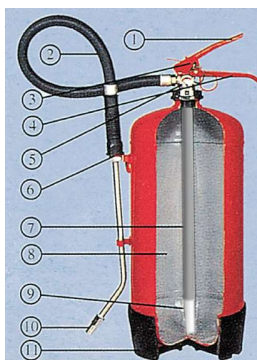

1. Valve/Extn. Lever
2. Discharge Hose
3. Safely Pin with Chain
4. Valve Handle
5. Pressure Gauge
6. Hose Holder
7. Syphon Tube
8. PVC Internal Coating
9. Filter
10. Discharge Nozzle
11. PVC Base

