


UNDER GROUND FIRE HYDRANT

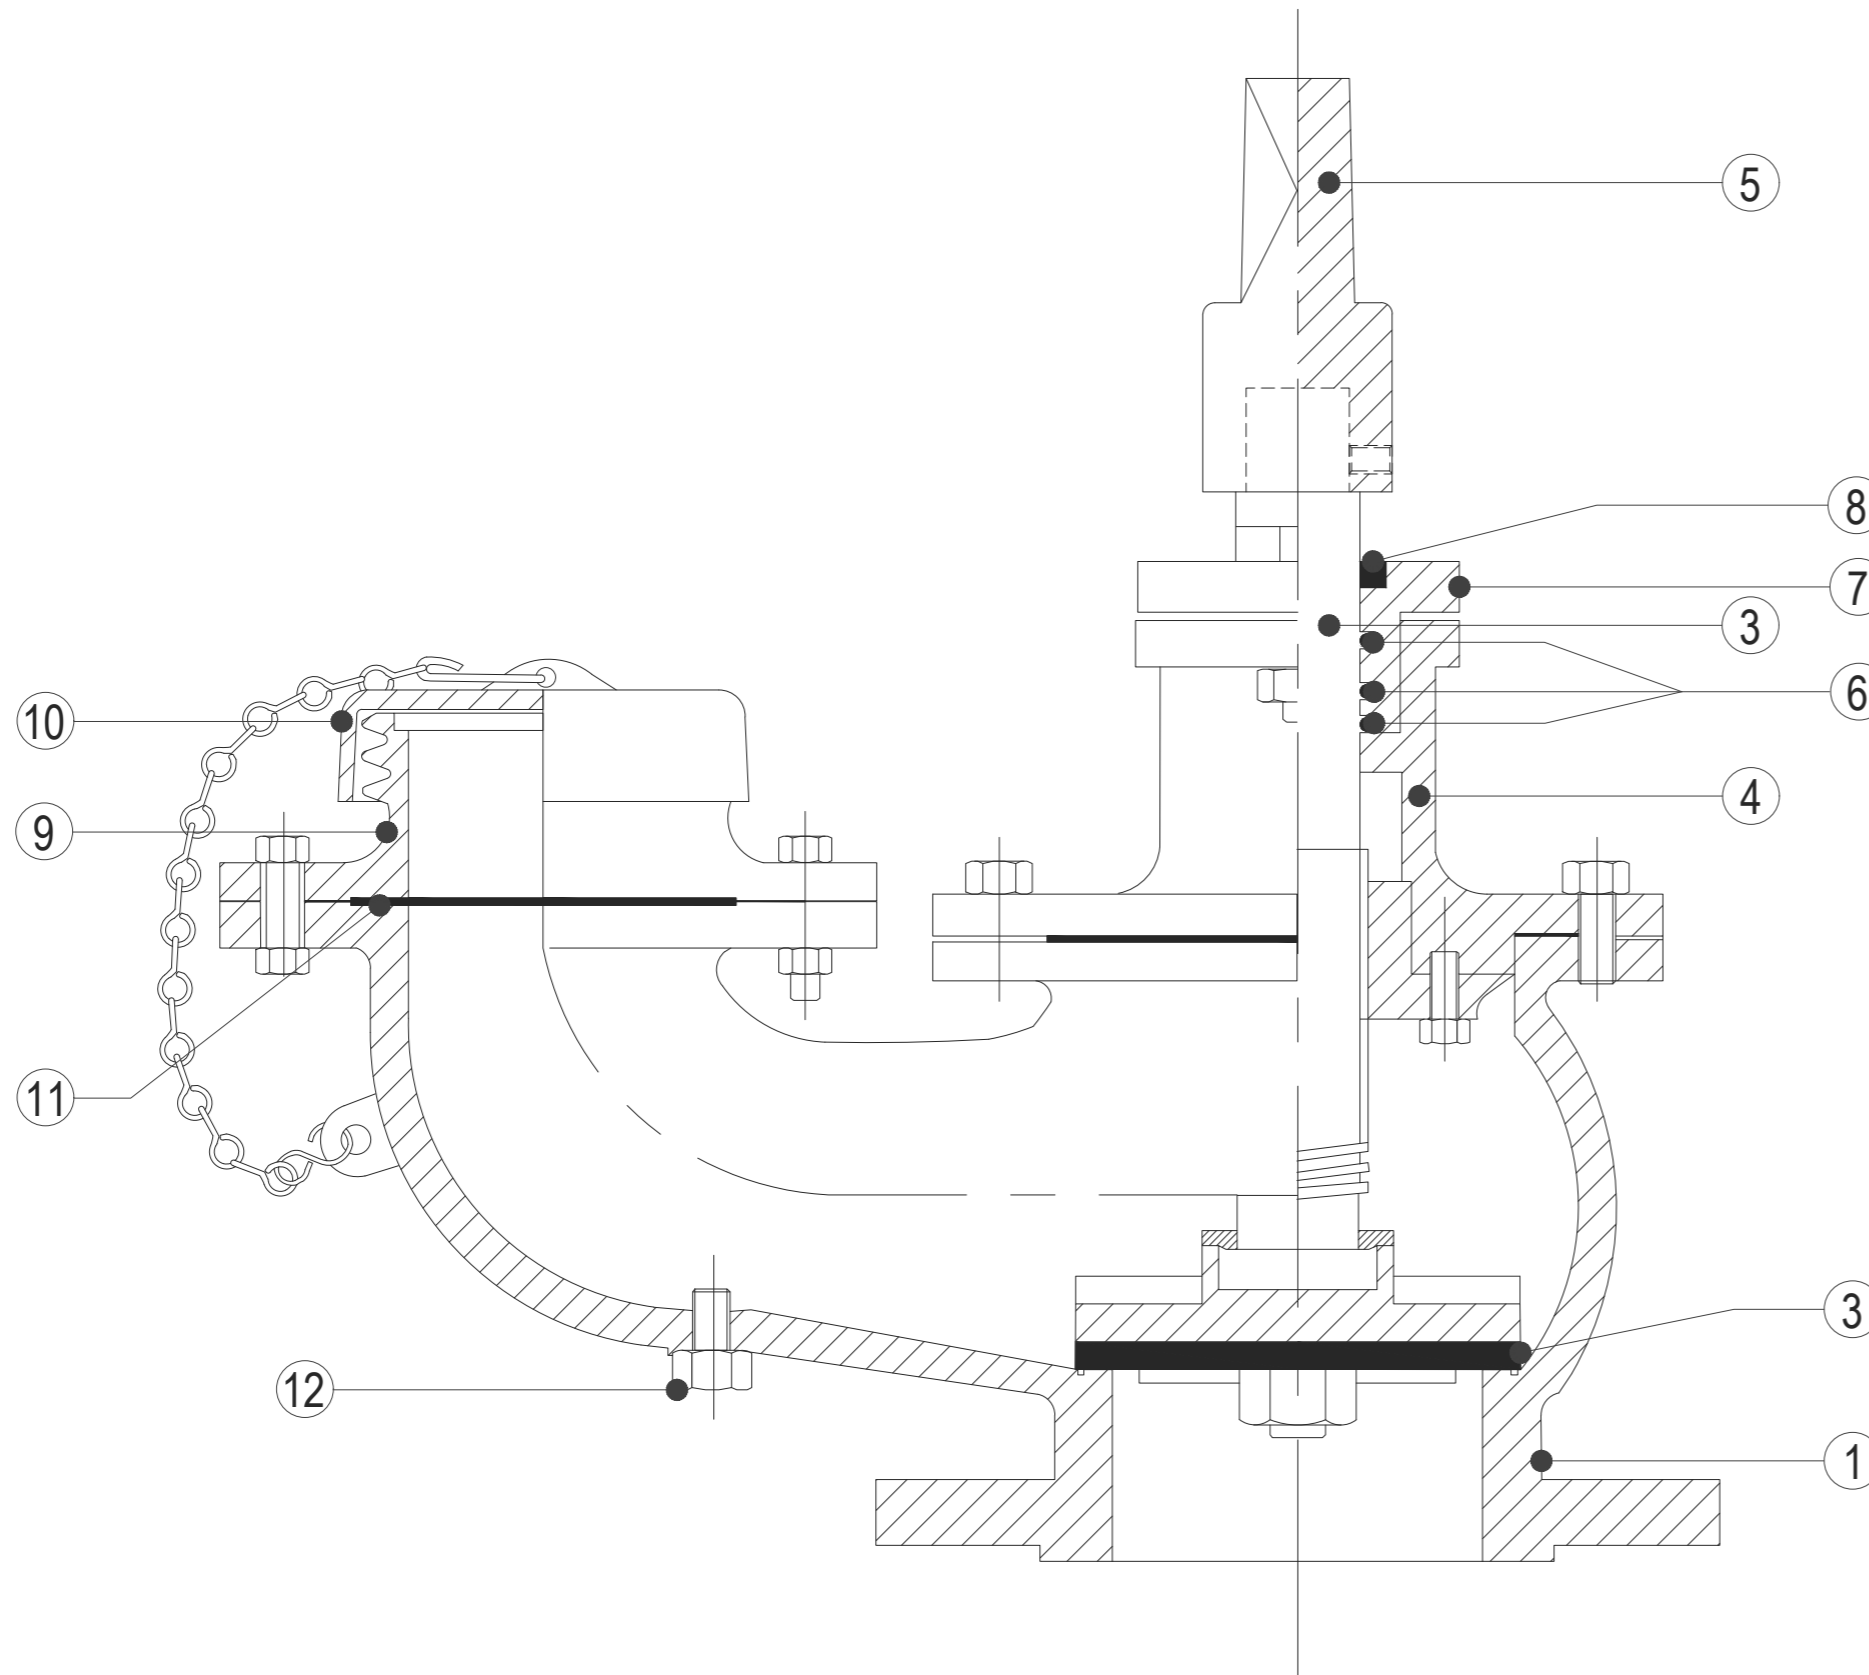

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

ITEM. NO	DESCRIPTION	MATERIAL
1	BODY	GREY CAST IRON (C.I) TO BS EN 1561
2	BODY SEATING SEAL	RUBBER TO BS 1154
3	SPINDLE	STAINLESS STEEL TO BS EN 10088-1
4	BONNET	GREY CAST IRON (C.I) TO BS EN 1561
5	SPINDLE CAP	GREY CAST IRON (C.I) TO BS EN 1561
6	SPINDLE (STEM) SEAL	RUBBER TO BS 1154
7	GLAND	GREY CAST IRON (C.I) TO BS EN 1561
8	GLAND WIPER RING	TEFLON
9	OUTLET	HIGH TENSILE BRASS TO BS 12163:2011
10	OUTLET CAP	GREY CAST IRON (C.I) TO BS EN 1561
11	OUTLET GASKET	RUBBER TO BS 1154
12	DRAIN BOLT	FORGED STEEL

SPECIFICATIONS

MODEL	NHYD058	
VALVE TYPE	SCREW DOWN (TYPE 2C)	
NOMINAL SIZE & FLANGE DRILLING	FLANGE-X	PN16, DN80, BS EN 1092-2
	FLANGE-Y	PN16, DN50, BS EN 1092-2
	FLANGE-Z	PN16, DN50, BS EN 1092-3
WORKING PRESSURE	16 BAR MAXIMUM	
TEST PRESSURE (BODY)	25 BAR	
TEST PRESSURE (SEAT)	20 BAR	