# STANDARD BRANCH PIPE

## PRODUCT DESCRIPTION


NAFFCO standard branch pipe is made by metal, suitable to use with fire hose assembly for fire fighting purpose. The branch pipe has male instantaneous coupling inlet manufactured to comply with BS 336: 2010 standards.

#### **FEATURES**

BSI Kitemark.

• Body material made of Aluminum alloy.



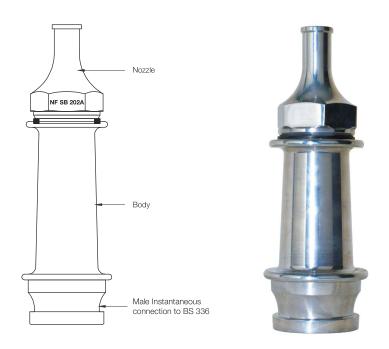

#### **SPECIFICATIONS**

| SECIFICATIONS            |   |
|--------------------------|---|
| Model Number             | NF SB 202A                                  |
| Туре                     | Standard branch pipe                        |
| Body and Nozzle Material | Aluminum to BS EN 1706: 2010                |
| Inlet Connection         | Male Instantaneous Coupling to BS 336: 2010 |
| Nozzle Hole Diameter     | 12.5 mm                                     |
| Working Pressure         | 16 bar                                      |
| Test Pressure            | 24 bar                                      |

## **ANGLE HOSE VALVE**

The Angle hose valve is manufactured as per NFPA 13 and most suitable for fire protection service outlet or with a hose rack assembly.

### **SPECIFICATIONS**

| Model No               | NF-AV38 1.5" Ø, Female NPT Inlet & Outlet |
|------------------------|---|
| Model No               | NF-AV65 2.5" Ø, Female NPT Inlet & Outlet |
| Angle Hose Valve Drain | 1.5" & 2.5"                               |
| Pressure Rating        | 300 psi                                   |
| Material               | Cast Brass                                |
| Hand Wheel             | Cast Iron                                 |
| Finish Standard        | Rough Brass/Polished Brass                |
| Optional               | Bright Chrome Plated                      |
| ·                      |   |

Female NPT x male NST connection available upon request.

