


HOSE RACK ASSEMBLY
NHR 38V

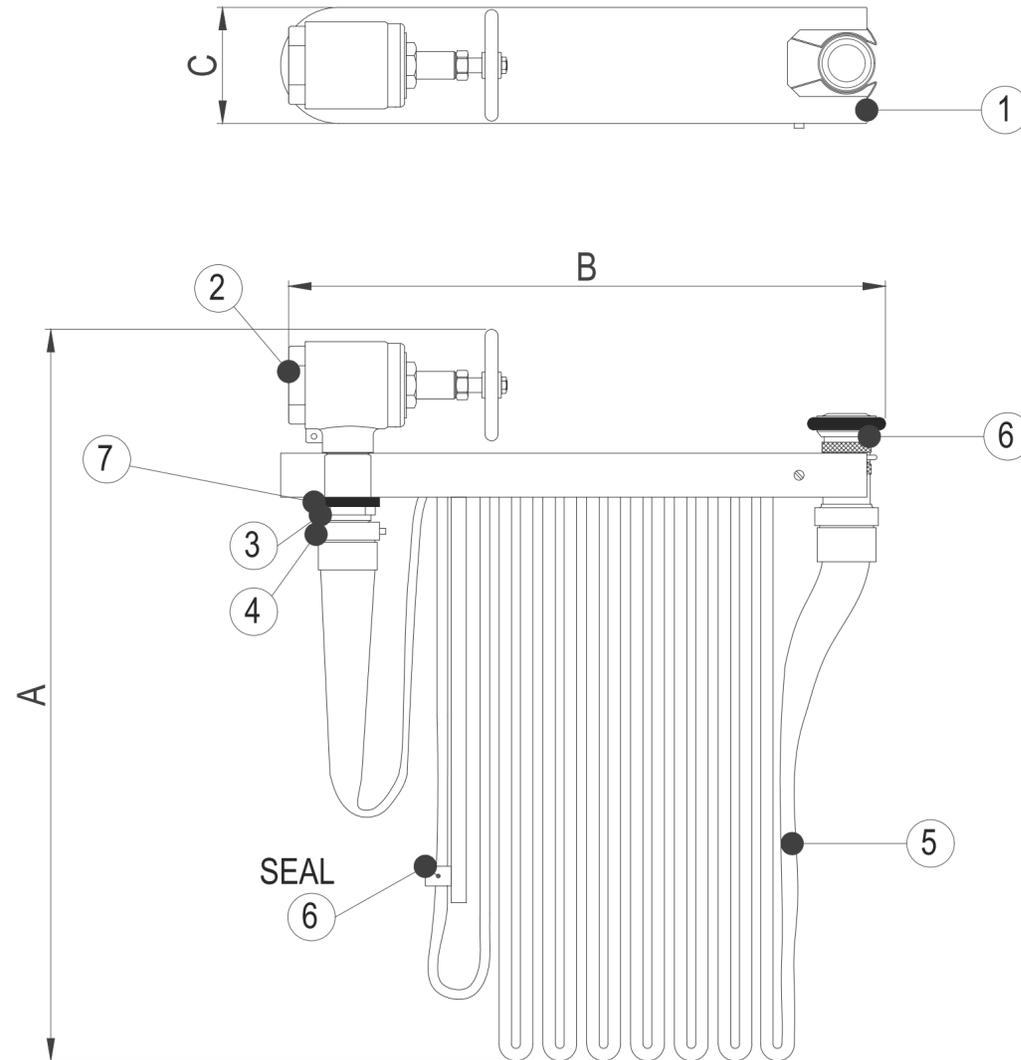

NOTES :-

- ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

ITEM NO.	DESCRIPTION	MATERIAL	QTY.
1	HOSE RACK FRAME, RED POLYESTER POWDER	STAINLESS STEEL, Gr.304	1
2	1-1/2" ANGLE HOSE VALVE FEMALE NPT INLET & OUTLET	ROUGH BRASS	1
	OPTIONAL: 1-1/2" PRESSURE REDUCING ANGLE VALVE WITH FEMALE NPT INLET & OUTLET	BRONZE	1
3	HOSE RACK NIPPLE MODEL : HRN 1-1/2"	BRASS	1
4	COUPLING	BRASS	1
5	1-1/2" X 30 MTR.FIRE HOSE	SINGLE JACKET FIRE HOSE BROUGHT OUT	1
6	1-1/2" FOG NOZZLE, MODEL : SD FN 65	BRONZE,ASTM C83600	1
7	SPACER	BRASS	1

SPECIFICATIONS

MODEL	NHR 38V
FIRE HOSE TYPE	SINGLE JACKET,LIGHT WEIGHT THERMOPLASTIC LINING WITH HIGH TENACITY FILAMENT POLYESTER YARN.(UL LISTED)
SIZE & COLOR	1 1/2" x 30m,WHITE
SERVICE PRESSURE	250PSI
PROOF PRESSURE	500PSI
BURST PRESSURE	750PSI
GENERAL TOLERANCE	±5MM
COUPLING TYPE	1 1/2" NH FEMALE THREADED COUPLING
ANGLE VALVE WORKING PRESSURE	300 PSI
ANGLE VALVE TEST PRESSURE	600MM
INLET SIZE	1 1/2" FEMALE NST THREADED
NOZZLE DISCHARGE RATE	130GPM @ 100PSI

DIMENSIONS

MODEL	HOSE LENGTH	HOSE DIA	A	B	C
NHR 38V	30Mtr(100ft)	1 1/2"	650	530	103