


INDUSTRIAL FIRE TRUCK MEDIUM

NFI-MEDIUM

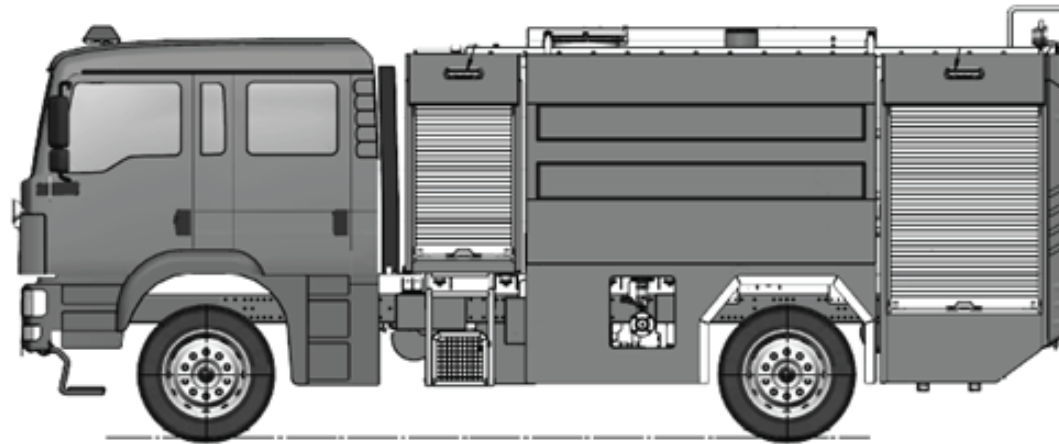

01 DESIGN GUIDELINES

- NFPA 1901
- EN 1846

03 CABIN

- Crew cabin for up to 6 people
- ECE R29 Tested

05 RESERVOIRS

- Water : up to 6000 Ltrs
- Foam : up to 500 Ltrs
- Polypropylene, GRP or SS316L construction

07 ELECTRICAL SYSTEM

- Automotive certified programmable controllers
- Robust touch screen panels/control switches
- Traffic related lights
- Warning lights
- Lockers lights
- Scene lights
- PA system

02 CHASSIS

- 4X2; 4X4
- GVW : Up to 21 T

04 BODYWORKS

- Aluminum 6061 T6 structures or Polypropylene bodyworks

06 FIREFIGHTING SYSTEM

- Up to 6000 lpm @ 10 bar fire pumps
- Balanced pressure foam system
- Roof monitor
- Fast attack hose reel
- Side hand-lines
- SS316L pipework

OPTIONS

- Fire pump with high pressure
- DCP system
- Demand balanced pressure foam system as per NFPA 1901