



FIRE HOSE REEL WITH SEMI-RIGID HOSE (AS/NZS 1221)

FEATURES

- Australian & New Zealand Standard AS/NZS 1221, certified by Global-Mark PLY Ltd.
- The fire hose reels are capable of rotating in one plane (fixed type) or rotating in more than one plane with mounting on one of the following: swinging arm, swinging pipe or swinging door in manual and automatic version.
- The automatic fire hose reels will open fully within 3 revolution of the reel.
- The nozzle has SHUT, JET and SPRAY control settings.
- The minimum flow rate of hose reels in JET and SPRAY setting at 220 kpa pressure; for 13mm nozzle is 0.24 L/S, for 19mm nozzle is 0.45 L/S and for 25mm nozzle is 0.55 L/S.
- The effective throw range of discharge at 0.2 MPa (2 bar) pressure is 10 mtrs. in JET setting.
- The reel discs are painted RED with printed user instructions.

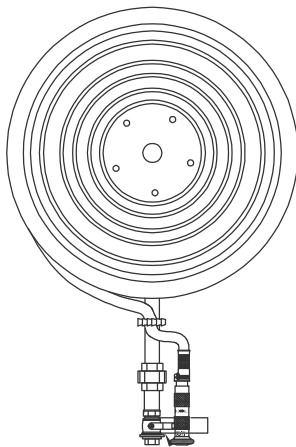

SPECIFICATION for NAFFCO MODELS

Type	Model No.	Hose Diameter & Length
30m Cabinet Manual	NFHA-C13M	Length:30m, Diameter: 13mm, Nozzle: Metal Twist Off/Jet
30m Cabinet Automatic	NFHA-C-19A	Length:30m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
36m Cabinet Automatic	NFHA-C-19A 36	Length:36m, Diameter: 19mm, Nozzle: Metal Off/Jet/Spray
30m Cabinet Manual	NFHA-C19M	Length:30m, Diameter: 19mm, Nozzle: Metal Off/Jet/Spray
36m Cabinet Manual	NFHA-C19M 36	Length:36m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
30m Cabinet Automatic	NFHA-C25A	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray
30m Cabinet Manual	NFHA-C25M	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray
30m Fixed	NFHA-F-13M	Length:30m, Diameter: 13mm, Nozzle: Metal Twist Off/Jet
30m Automatic Fixed	NFHA-F-19A	Length:30m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
36m Automatic Fixed	NFHA-F-19A 36	Length:36m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
30m Fixed	NFHA-F-19M	Length:30m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
36m Fixed	NFHA-F-19M 36	Length:36m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
30m Automatic Fixed	NFHA-F-25A	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray
30m Fixed	NFHA-F-25M	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray
30m Swing Arm	NFHA-W-13M	Length:30m, Diameter: 13mm, Nozzle: Metal Twist Off/Jet
30m Automatic Swing Arm	NFHA-W-19A	Length:30m, Diameter: 19mm, Nozzle: Metal Off/Jet/Spray
36m Automatic Swing Arm	NFHA-W-19A 36	Length:36m, Diameter: 19mm, Nozzle: Metal Off/Jet/Spray
30m Swing Arm	NFHA-W-19M	Length:30m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet
36m Swing Arm	NFHA-W-19M 36	Length:36m, Diameter: 19mm, Nozzle: Metal Twist Off/Jet/Spray
30m Automatic Swing Arm	NFHA-W-25A	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray
30m Swing Arm	NFHA-W-25M	Length:30m, Diameter: 25mm, Nozzle: Metal Twist Off/Jet/Spray