

SHIELDTM

SHIELDFLEX

SPRINKLER DROP

Quick & Easy Installation





SHIELDFLEX SPRINKLER DROP

Save time! Save labor! Save money!

SHIELDFLEX Sprinkler Drops are designed to significantly reduce labour and installation costs. Available in 5 different lengths with 1/2" or 3/4" NPT on reducer thread.


Technical Data Unbraided Model: SDF-N

Temperature	225°F / 107°C	
Working Pressure	175 psi	
Connection	Inlet	1" NPT / BSPT
	Outlet	1/2" or 3/4" NPT
Maximum Bend Radius	*Do not bend within 2.52 inches from the connection nuts.	
Maximum Number of Bend	Refer to Friction Loss Data	
K- Factor	1/2" Outlet	5.6 gpm
	3/4" Outlet	14.0 gpm
Bending angles(flow direction)	Up to 180 degree	
Length in mm	700, 1000, 1200, 1500 & 1800	

Unbraided Flexible Tube



Braided Flexible Tube

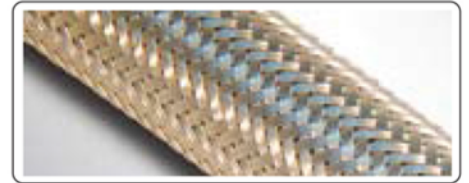

Technical Data Braided Model: SDF-B FM Listed / UL Listed

Temperature	225°F / 107°C	
Working Pressure	200 psi	
Connection	Inlet	1" NPT / BSPT
	Outlet	1/2" or 3/4" NPT
Maximum Bend Radius	*Do not bend within 2.52 inches from the connection nuts.	
Maximum Number of Bend	Refer to Friction Loss Data	
K- Factor	1/2" Outlet	5.6 gpm
	3/4" Outlet	14.0 gpm
Bending angles(flow direction)	Up to 180 degree	
Length in mm	700, 1000, 1200, 1500 & 1800	

Inlet Nipples



Bottom Up Reducer



Center Brackets




Square Bar



Features

Intended use: Wet and Dry System

Wing Brackets



Friction Loss Data

Length (mm)	Outlet Connection	Maximum Number of 90° Bends	Minimum Bend Radius, in.	Equivalent Length of 1 in. Schedule 40 pipe, (C=120),ft
700	1/2"	1	6	12
	3/4"	1	6	17
1000	1/2"	1	6	43
	3/4"	1	6	53
1200	1/2"	2	6	65
	3/4"	2	6	22
1500	1/2"	2	6	35
	3/4"	2	6	39
1800	1/2"	2	6	47
	3/4"	2	6	53

* SHIELD reserves the right to change the contents without notice

UK Operation

Unit 3, Endeavour Drive,
Basildon-Essex,
SS14 3WF, United Kingdom.
Tel: +44 1708 377731
Fax: +44 1708 347637
Email: shielduk@shieldglobal.com

Regional office for Middle East & Africa

Jebel Ali Free Zone
Dubai,
United Arab Emirates
Tel: +971 (4) 8812070
Fax: +971 (4) 8812198
Email: shieldme@shieldglobal.com