


FIRE HOSE REEL CABINET
 DOUBLE VERTICAL RECESSED TYPE,
 COMPLETE COMPLETE STAINLESS STEEL,
 BRUSH FINISH,
 GLASS DOOR WITH BREAK GLASS AND KEY
 (MODEL: NF-RSBGK-900)

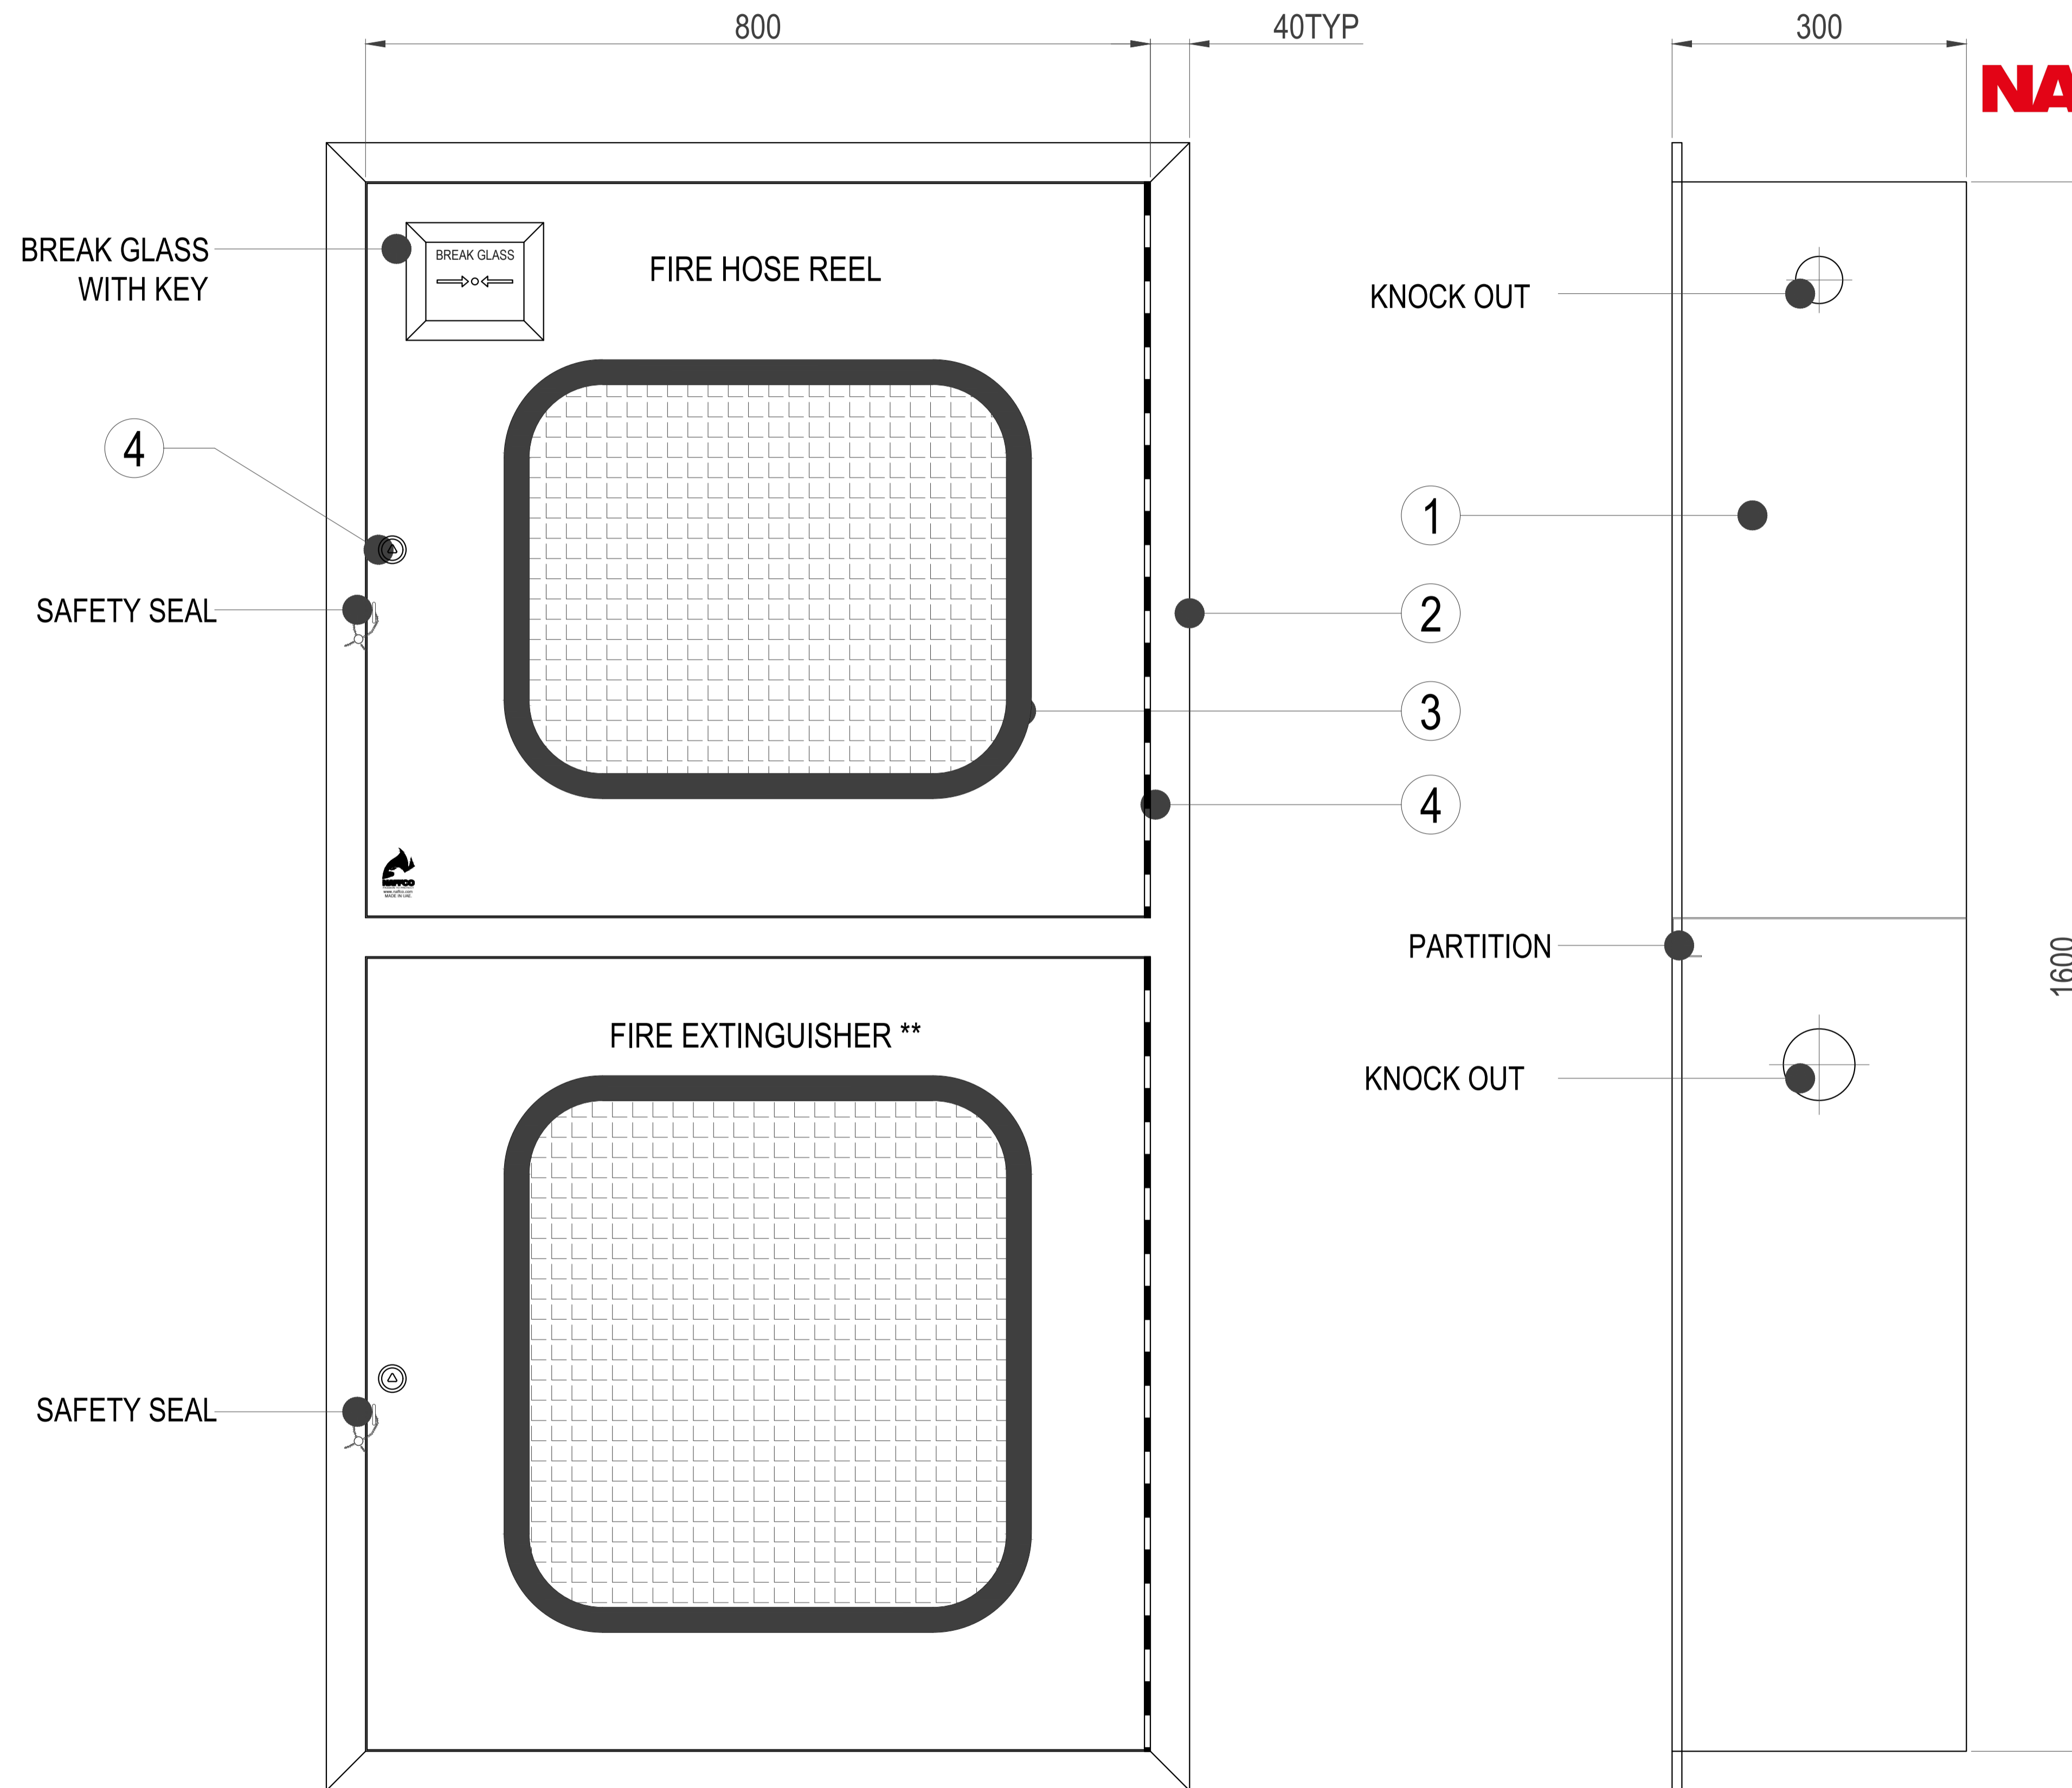

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

| ITEM NO. | DESCRIPTION | MATERIAL | QTY. |
|----------|----------------------------|------------------------------------|------|
| 1. | CABINET BACK BOX | 1.2mm STAINLESS STEEL BRUSH FINISH | 1 |
| 2. | FRAME | 1.2mm STAINLESS STEEL BRUSH FINISH | 1 |
| 3. | GLASS DOOR (WIRED / CLEAR) | 1.2mm STAINLESS STEEL BRUSH FINISH | 2 |
| 4. | PIANO HINGES | MILD STEEL | 2 |
| 5. | SPRING LOCK WITH KEY | ALLOY STEEL | 2 |

SPECIFICATIONS

| | |
|------------------------|--|
| MODEL | NF RSBGK 900 |
| PAINT FINISH | STAINLESS STEEL BRUSH FINISH |
| DOOR OPENING | RIGHT OR LEFT |
| CABINET TO ACCOMMODATE | |
| TOP COMPARTMENT | 1"x30Mtr. OR 3/4"x30Mtr. CABINET MOUNTED / WALL MOUNTED FIRE HOSE REEL |
| BOTTOM COMPARTMENT | 5Kg. CO2 EXTINGUISHER, 6Kg. DCP EXTINGUISHER 2.5" LANDING VALVE OR 1.5"x 30Mtr HOSE RACK / 2.5"x30Mtr. HOSE RACK |
| BRACKET POSITION | RIGHT OR LEFT |
| KNOCK OUT | AS PER INLET LINE |
| GENERAL TOLERANCE | ±5MM |
| UNIT HEIGHT | 1600MM |
| UNIT WIDTH | 800MM |
| UNIT DEPTH | 300MM |

**LOWER COMPARTMENT PRINTING WILL CHANGE ACCORDING TO THE EQUIPMENTS TO BE ACCOMMODATED