


FIRE HOSE REEL CABINET
 DOUBLE VERTICAL SURFACE MOUNTED,
 COMPLETE E.G SHEET,
 SOLID DOOR WITH BREAK GLASS AND KEY
 (MODEL: NF-SMPK-900)

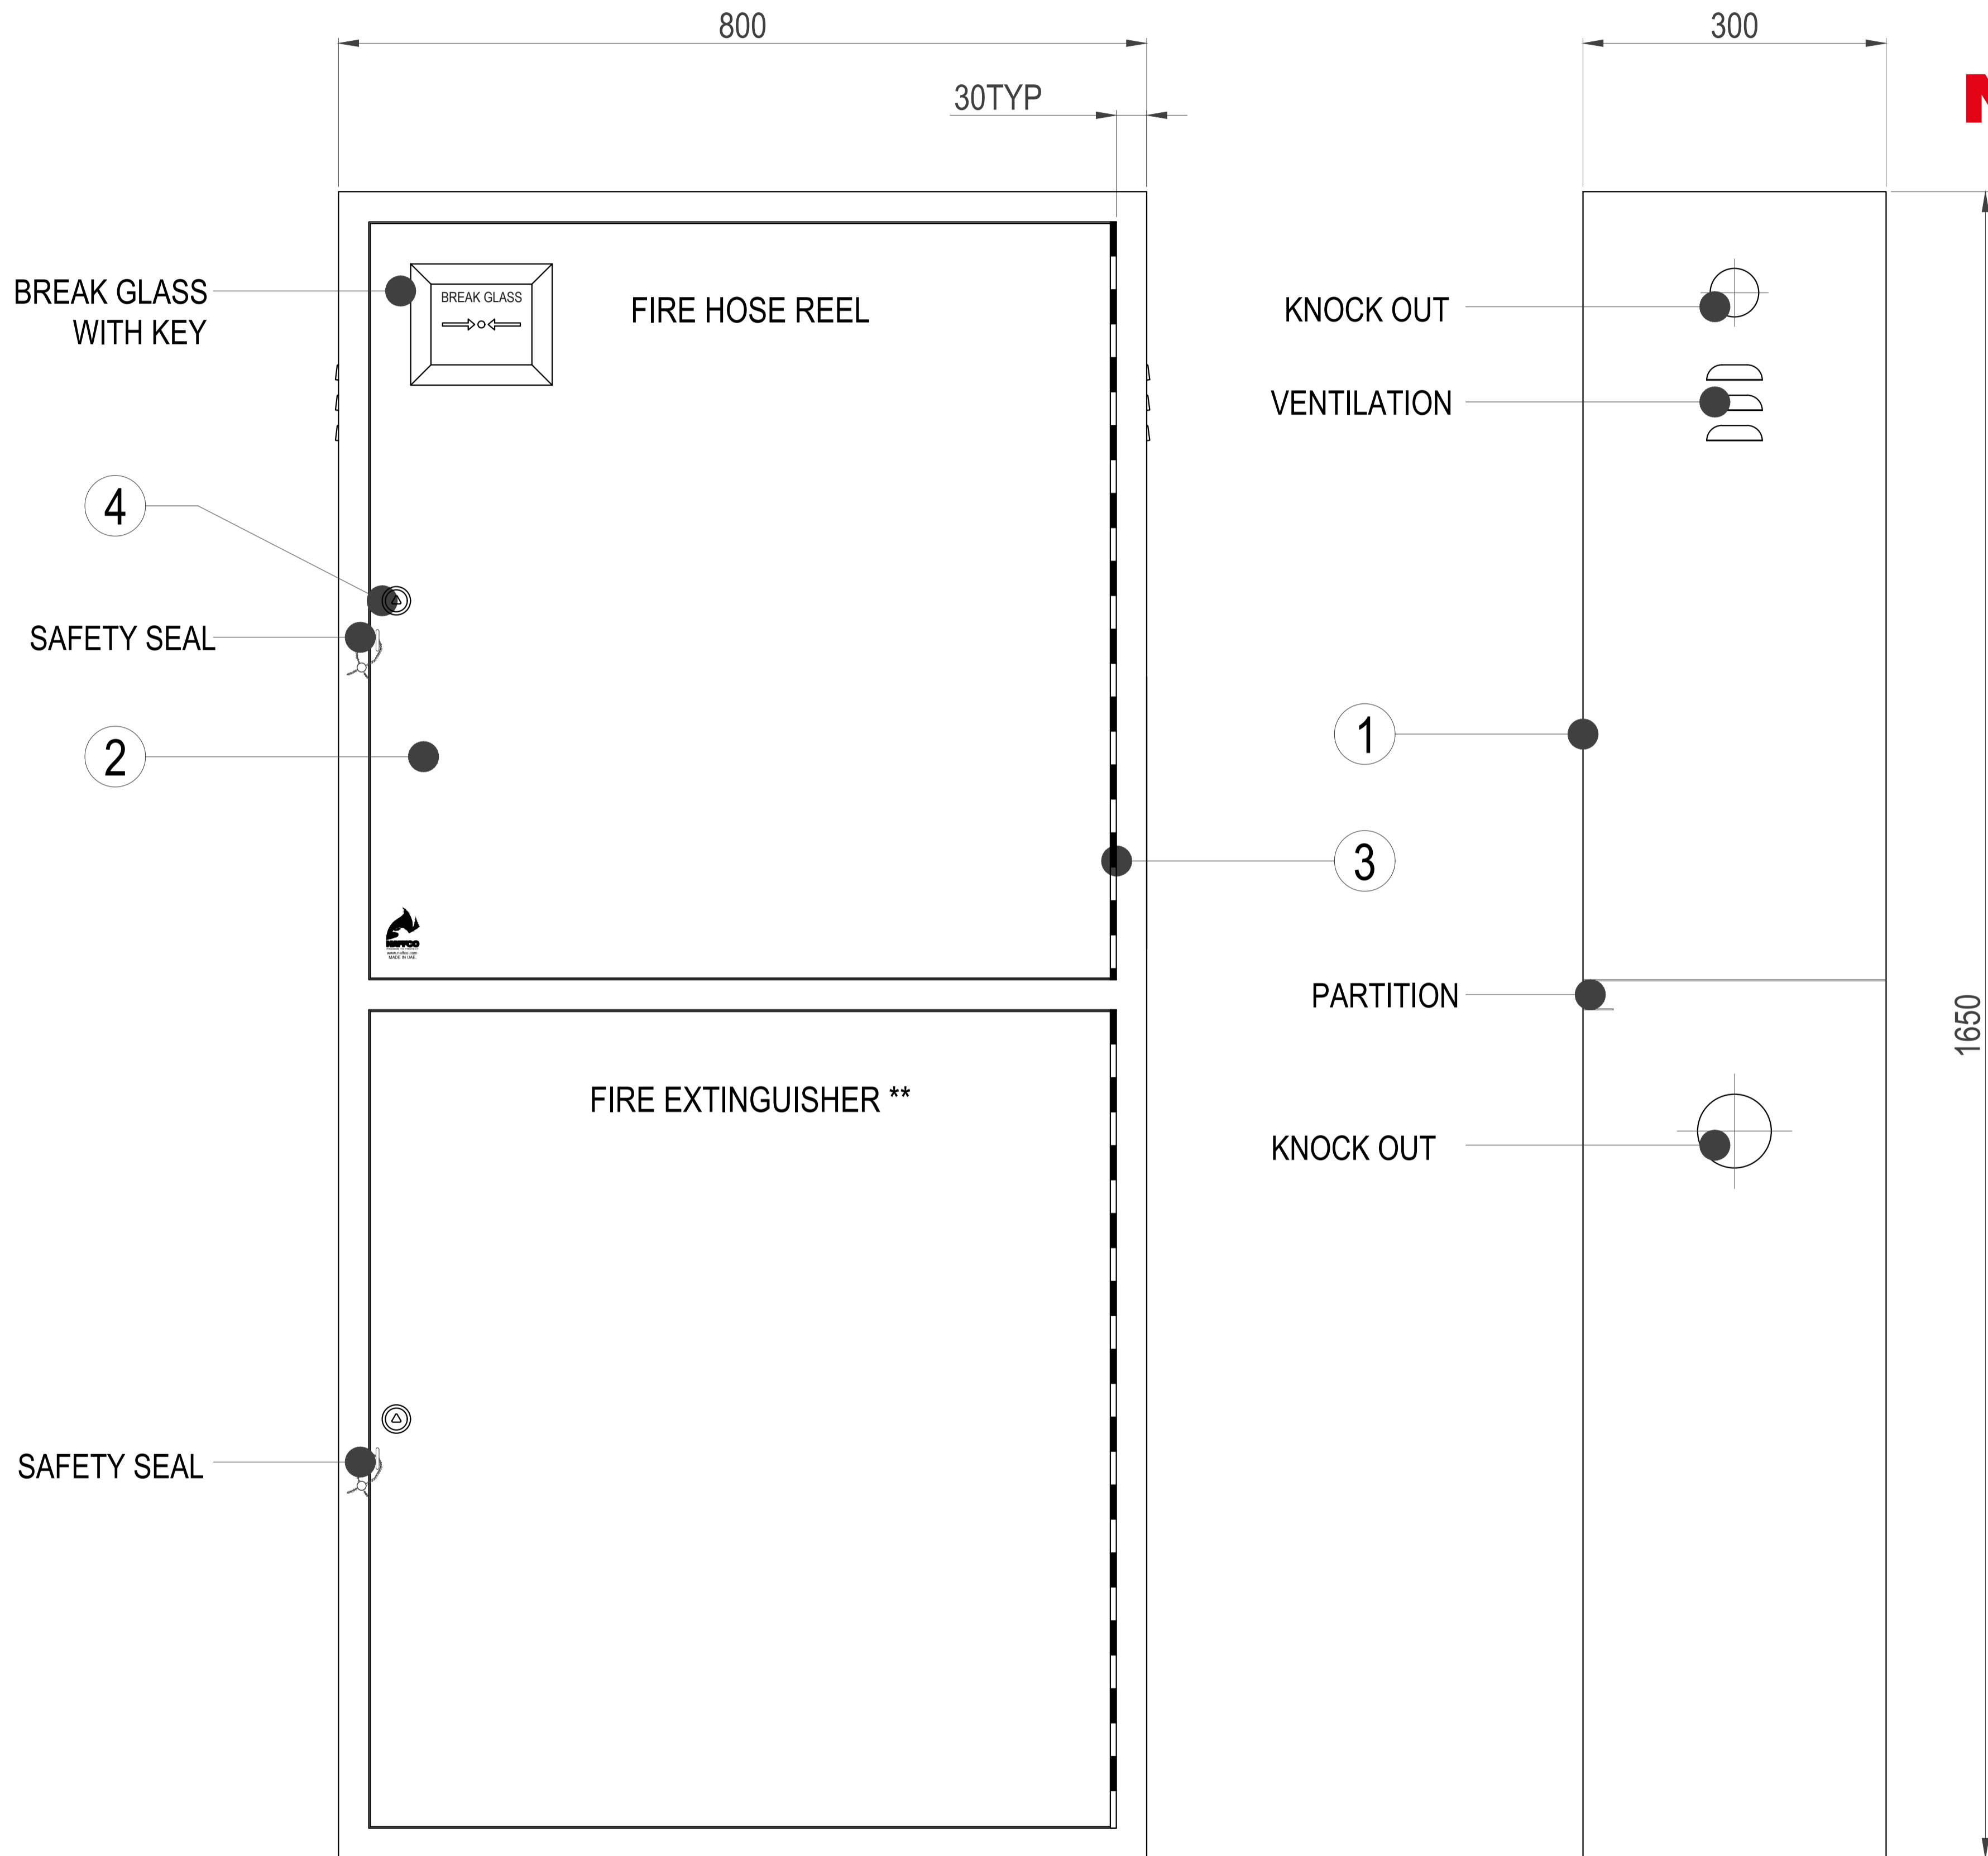

NOTES :-

1. ALL DIMENSIONS ARE IN mm. UNLESS OTHERWISE SPECIFIED

BILL OF MATERIALS

| ITEM NO. | DESCRIPTION | MATERIAL | QTY. |
|----------|----------------------|--------------------------------------|------|
| 1. | CABINET BODY | 1.2mm ELECTRO GALVANISED STEEL SHEET | 1 |
| 2. | SOLID DOOR | 1.2mm ELECTRO GALVANISED STEEL SHEET | 2 |
| 3. | PIANO HINGES | STAINLESS STEEL | 2 |
| 4. | SPRING LOCK WITH KEY | ALLOY STEEL | 2 |

SPECIFICATIONS

| | |
|------------------------|--|
| MODEL | NF SMPK 900 |
| PAINT FINISH | AS PER REQUIREMENT |
| DOOR OPENING | RIGHT OR LEFT |
| CABINET TO ACCOMMODATE | |
| TOP COMPARTMENT | 1"x30Mtr. OR 3/4"x30Mtr. CABINET MOUNTED / WALL MOUNTED FIRE HOSE REEL |
| BOTTOM COMPARTMENT | 5Kg. CO2 EXTINGUISHER, 6Kg. DCP EXTINGUISHER 2.5" LANDING VALVE OR 1.5"x 30Mtr HOSE RACK / 2.5"x30Mtr. HOSE RACK |
| BRACKET POSITION | RIGHT OR LEFT |
| KNOCK OUT | AS PER INLET LINE |
| GENERAL TOLERANCE | ±5MM |
| UNIT HEIGHT | 1650MM |
| UNIT WIDTH | 800MM |
| UNIT DEPTH | 300MM |

**LOWER COMPARTMENT PRINTING WILL CHANGE ACCORDING TO THE EQUIPMENTS TO BE ACCOMMODATED