



NFM 40/4-SC
Light Duty Firefighting Vehicle

NFM 40/4-SC

Light Duty Firefighting Vehicle

CHASSIS

MAN TGL 12.180, 4x2, Single Cabin, Manual Transmission, 180 HP, 11,900 KG GVW

BODY STRUCTURE

Made using aluminum profiles 6061 T6, fastened to a strong base structure made of stainless steel tubing

STORAGE LOCKERS

Five (5) storage lockers, two on the R/H side and two on the L/H side and one on the rear of the vehicle closed by light alloy roller shutters.

WATER & FOAM TANKS

4,000/400 Liters made of Polypropylene with life time warranty

FIRE PUMP

PTO Driven, Single stage, centrifugal type normal pressure pump, 2,000 LPM at 10 bar and 3 meter suction lift.

FOAM SYSTEM

Around-the-Pump-Foam Proportioning System 0 - 6 %, Manual adjustable

MONITOR


Water / Foam Monitor with jet/fog pattern, with adjustable output from 800 LPM to 1,600 LPM and throw range up to 50 meters

HOSE REEL

Manual Rewind hose reel fitted with rubber hose of 1.25" x 30m fitted with pistol type nozzle for jet and fog patterns.

ACCESSORIES

Wide range of fire fighting accessories and equipments including hoses, nozzle, SCBA Sets, Generator and personal fire protection sets.

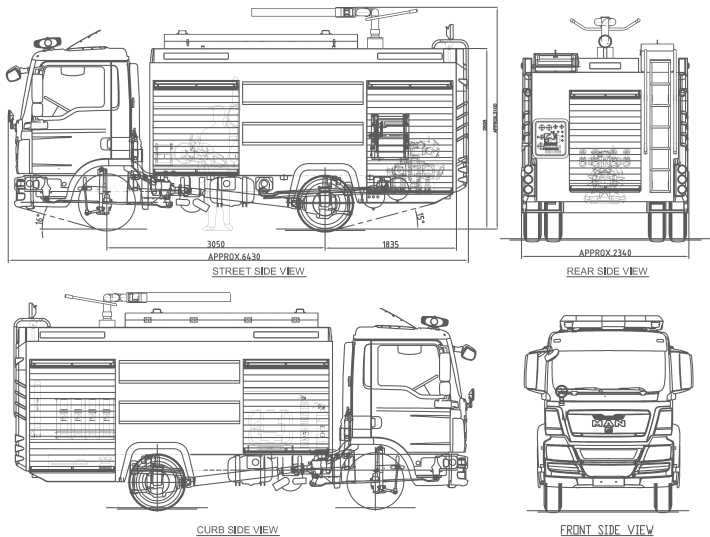

Notes:

NAFFCO reserve the right to introduce minor changes to improve operational and performance related aspects of the vehicle and if also necessary to supply equivalent equipment/components if they should become unavailable or obsolete.